



BADU®JET

Water Treadmill



Complies with UL 1563
Swimming Pool Equipment
Listing #E212148

The full featured Badu®Jet offers suction and discharge in the unique, patented, one-piece dual nozzle housing. Volume control and on/off button are conveniently located on the face of the jet housing.




Features

- A. Flush mounted, plastic housing, 16" diameter.
- B. Rectangular anti-entrapment cover for undetectable suction (20" x 17").
- C. Adjustable recessed jet nozzles.
- D. Volume control knob adjusts flow of water.
- E. Pneumatic on/off button guarantees complete separation between pool water and pump motor control.
- F. Air regulator adjusts amount of air bubbles in water flow.
- G. Tubing for pneumatic button, 50 feet (not shown).
- H. Control box with **GFCI**.
- I. Speck 4 HP self-priming, plastic pump. UL Listed, single phase with thermal overload (no motor starter required).
- J. Massage hose with pulsator may be attached to jet nozzle.

Dual Nozzle super-sport

INSTALLATION SCHEMATIC

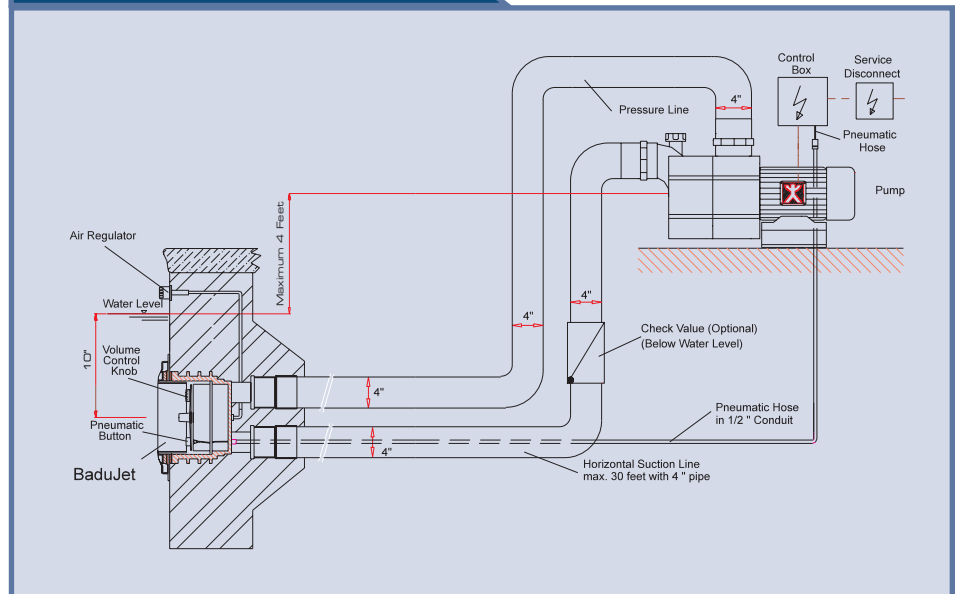

Single Nozzle CLASSIC

Installation

The **BADU®JET** is normally incorporated into the original pool design, but it can be added to any pool at a later date.

The **BADU®JET** has no protruding parts ensuring pool users' safety. Very compact, installs at minimal cost.

The **BADU®JET** system includes control box with relay and air switch and 50 feet of air tubing.

Minimum 4" plumbing is required. Pump and Control also available in 3 phase. Read all instructions before installing.

Consult your physician before attempting any strenuous exercise. This product may not be challenging or satisfying for all levels of exercise.



Optional original round style double ring cover available for curved pool walls.